TYPICAL 24" ROLL-BACK CURB

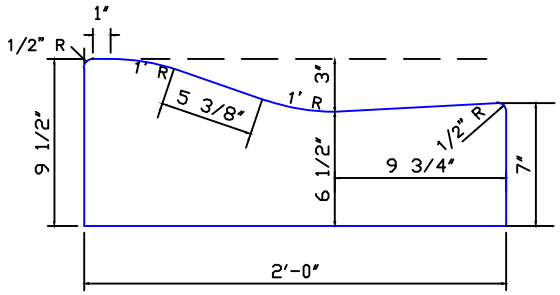

TOLERANCE TO NEAREST 1/16"

TYPICAL 30" ROLL CURB

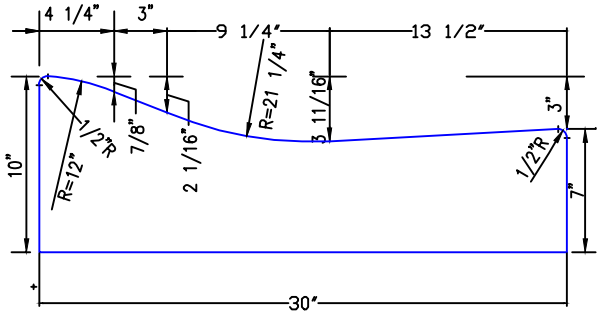

TOLERANCE TO NEAREST 1/16"

TYPICAL 24" VERTICAL CURB

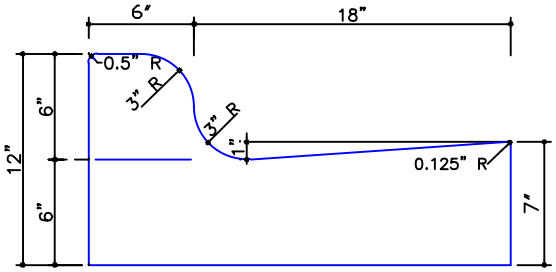

TYPICAL 30" VERTICAL CURB

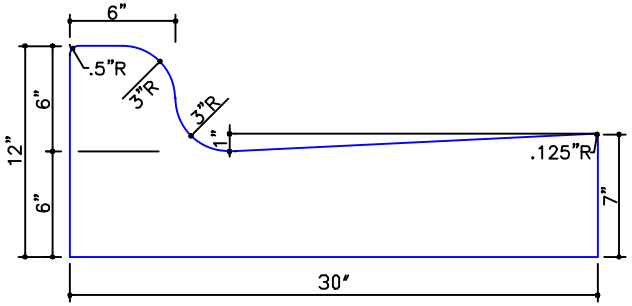

TYPICAL 24" SPILL-OFF CURB

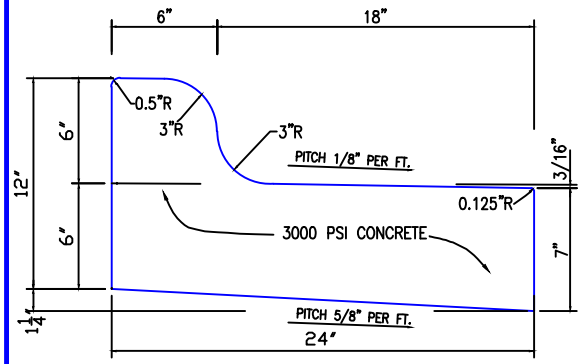

TYPICAL 30" SPILL-OFF CURB

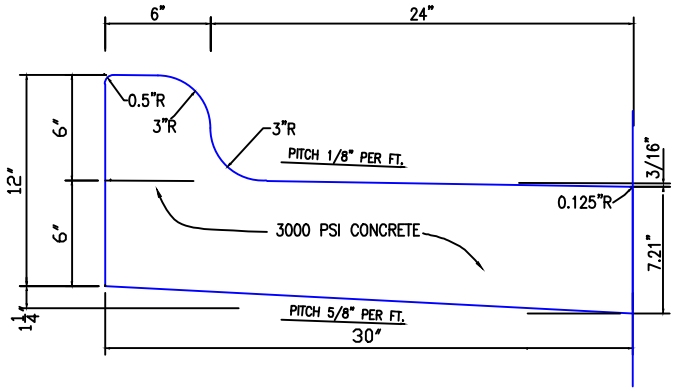

NOTE:
DUMMY GROOVE JOINTS EVERY 10'
EXPANSION JOINTS EVERY 30'

Fayetteville North Carolina
ENGINEERING & INFRASTRUCTURE DEPT.
CIVIL ENGINEERING DIVISION
433 HAY ST. 28301
(910) 433-1656

24" & 30" CURB DETAILS

DATE	6/10/2014	DRAWN BY	CSA
SCALE	N.T.S.	CK'D BY	CSA

CAD FILE : 24_30curb

SD-1